


GLOBE VALVE OS&Y: FLANGED X FLANGED - CLASS 150 (B16.24/B16.10) Brass

FEATURES

- ◆ Class 150 globe valve
- ◆ Rising stem (RS) bolted bonnet OS&Y
- ◆ Disc: ASTM B62
- ◆ Body: ASTM B62
- ◆ Stem: high tensile bronze
- ◆ Bonnet: ASTM B62
- ◆ Temperature range: -50°F to 250°F
(-45.5°C to 121°C)
- ◆ Face to face: ANSI B16.10
- ◆ Flange: Class 150 ANSI 16.24
- ◆ Open/close position indicator

OPTION

- ◆ Padlocking device
- ◆ Graduated open/close
position indicator
- ◆ Sampling device

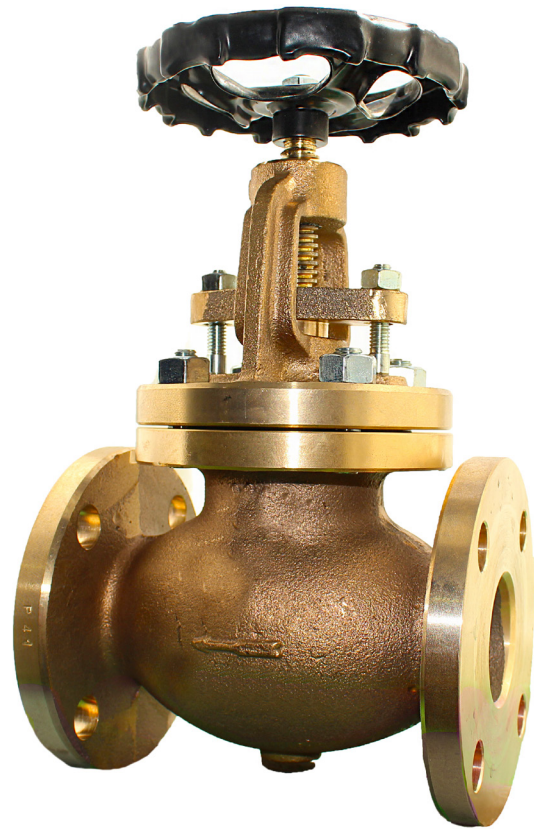

These valves are also available in cast steel; dimensions can be specified in Metric, U.S. Standard or JIS.


GLOBE VALVE OS&Y: FLANGED X FLANGED - CLASS 150 (B16.24/B16.10)

Brass

DIMENSIONS								
SIZE	A	B	C	D	E	H	n	K
½"	140	168.2	89	89	7.9	16	4	60.3
¾"	140	168.2	89	99	8.75	16	4	69.9
1"	152.4	184	101.6	108	9.5	16	4	79.4
1 ¼"	165	184	101.6	118	10.3	16	4	88.9
1 ½"	178	203.2	114	127	11	16	4	98.4
2"	203	219	140	152.4	12.7	19	4	120.7
2 ½"	216	246	140	178	14.25	19	4	139.7
3"	241	260.3	152.4	190.5	15.875	19	4	152.4
3 ½"	266.7	260.3	203.2	216	17.5	19	4	177.8
4"	292	311	203.2	228.6	17.5	19	8	190.5
5"	330.2	409.5	228.6	254	19	22	8	215.9
6"	406.4	431.8	254	279.4	20.6	22	8	241.3
8"	495	571.5	305	342.9	23.8	22	8	298.5
10"	622	673	355.5	406.4	25.4	25.4	12	362
12"	698.5	736.5	457.2	482.6	27	25.4	12	432

* All dimensions recorded in millimeters

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	HAND WHEEL	STEEL ALLOY	1
2	BONNET	BRONZE ASTM B62	1
3	BODY	BRONZE ASTM B62	1
4	SPINDLE	HIGH TENSILE BRONZE	1
5	DISC	BRONZE ASTM B62	1

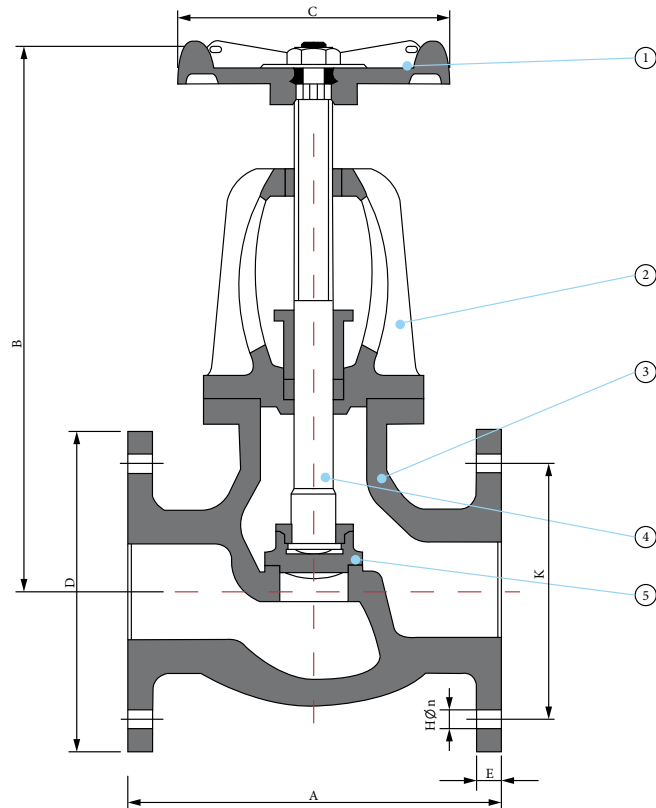

THERMOFLEX

Thermoflex 2136 Rue Léger, LaSalle, Québec, H8N 2L8, Canada

1-888-352-3414 514-367-1444 514-367-3193

thermoflex@bellnet.ca thermoflex.ca