

GLOBE VALVE RS: FLANGED X FLANGED – CLASS 150 (B16.24/B16.10) Brass

FEATURES

- ◆ Class 150 globe valve
- ◆ Rising stem (RS) screw bonnet
- ◆ Disc: JIS BC6
- ◆ Body: JIS BC6
- ◆ Stem: JIS 3771BD
- ◆ Packing: non-asbestos
- ◆ Temperature range: -50°F to 250°F
(-45.5°C to 121°C)
- ◆ Face to face: ANSI B16.10
- ◆ Flange: Class 150 ANSI 16.24
- ◆ Open/close position indicator

OPTION

- ◆ Padlocking device
- ◆ Graduated open/close
position indicator
- ◆ Sampling device



These valves are also available in cast steel; dimensions can be specified in Metric, U.S. Standard or JIS.

* *Flanged assemblies: the pressure capacity of valve and flange assembly is restricted to the flange and not the valve.*


GLOBE VALVE RS: FLANGED X FLANGED – CLASS 150 (B16.24/B16.10)

Brass

DIMENSIONS								
SIZE	D1	D	L	K	n	h	t	C
½"	20	89	108	60.3	4	15.9	7.9	48
¾"	25	98	118	69.9	4	15.9	8.7	48
1"	30	108	127	79.4	4	15.9	9.5	55
1 ¼"	37	117	140	88.9	4	15.9	10.3	68
1 ½"	45	127	165	98.4	4	15.9	11.1	68

* All dimensions recorded in millimeters

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	BODY	BC6	1
2	BONNET	BC6	1
3	DISC	BC6	1
4	DISC NUT	C3771BD	1
5	PACKING GLAND	C3771BD	1
6	PACKING GLAND NUT	C3604BD	1
7	STEM	C3771BD	1
8	SET SCREW	C2700W	2
9	HANDWHEEL	FC200	1
10	HEXAGON NUT	C3604BD	1
11	SPLIT PIN	C2600W	1
12	LOCK PLATE	C2600P	1
13	DISC LOCK WASHER	C2600P	1
14	PACKING	NON ASBESTOS	1
15	NAME PLATE	C2801P	1
16	BONNET BUSH	C3771BD	1

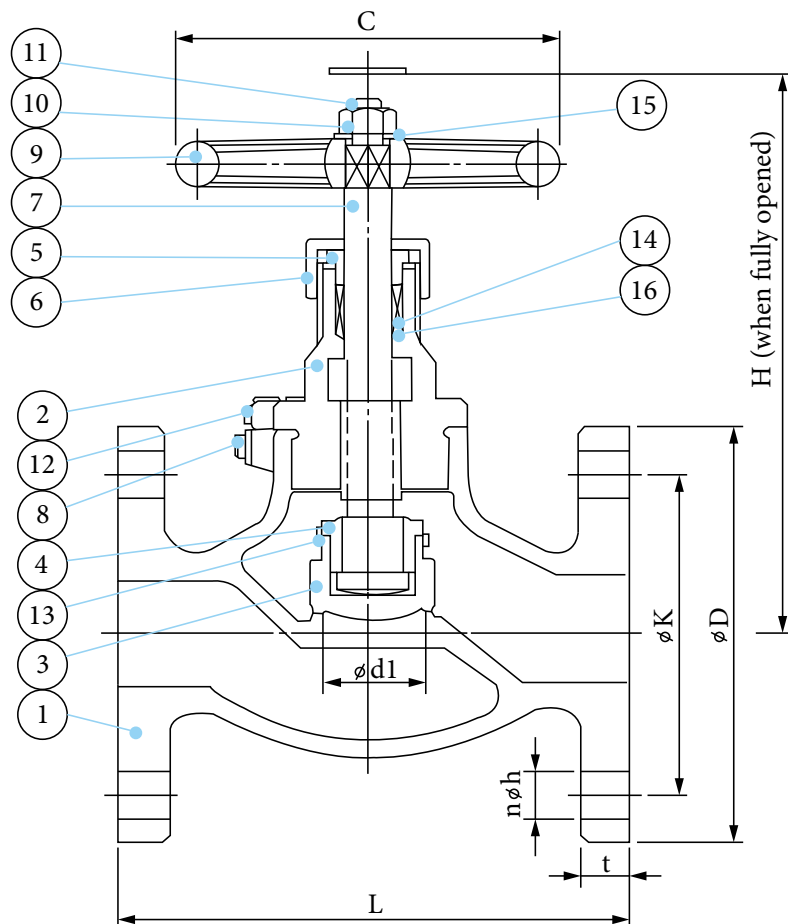

THERMOFLEX

Thermoflex 2136 Rue Léger, LaSalle, Québec, H8N 2L8, Canada

1-888-352-3414 514-367-1444 514-367-3193

thermoflex@bellnet.ca thermoflex.ca