

GLOBE VALVE: THREADED

Stainless Steel

FEATURES

- ◆ 200WOG globe valve
- ◆ Working pressure: 200PSI
- ◆ Rising stem
- ◆ Disc: ASTM A351 CF8M
- ◆ Body: ASTM A351 CF8M
- ◆ Seat: 316SS
- ◆ Threaded bonnet
- ◆ Adjustable stem packing
- ◆ NPT threaded end connections
- ◆ Temperature range: -58°F to 350°F (-50°C to 176°C)
- ◆ Test standard: API 598
- ◆ Open/close position indicator

OPTION

- ◆ Padlocking device
- ◆ Graduated open/close position indicator




GLOBE VALVE: THREADED

Stainless Steel

| DIMENSIONS | | | | | | |
|------------|----|-------|-----|-------|------|------|
| SIZE | P | W | H | L | CV | WT |
| 1/4" | 10 | 60 | 102 | 52 | 1 | 0.73 |
| 3/8" | 12 | 60 | 102 | 52 | 1.5 | 0.68 |
| 1/2" | 12 | 70 | 95 | 66 | 2.5 | 0.93 |
| 3/4" | 15 | 70 | 99 | 68.5 | 5.6 | 1 |
| 1" | 20 | 76.5 | 102 | 78.3 | 10.5 | 1.37 |
| 1 1/4" | 25 | 103.5 | 126 | 86 | 17 | 2.31 |
| 1 1/2" | 33 | 103.5 | 136 | 98 | 25 | 3 |
| 2" | 40 | 121 | 156 | 110.5 | 46 | 4.63 |

* All dimensions recorded in millimeters

| MATERIALS LIST | | | |
|----------------|---------------|-----------------|-----|
| No | PART | MATERIAL | QTY |
| 1 | NUT | 304SS | 1 |
| 2 | HANDWHEEL | 400SS | 1 |
| 3 | STEM | ASTM A276 316SS | 1 |
| 4 | GLAND NUT | ASTM A351 CF8M | 1 |
| 5 | GLAND | ASTM A351 CF8M | 1 |
| 6 | GLAND PACKING | PTFE | 1 |
| 7 | BONNET | ASTM A351 CF8M | 1 |
| 8 | GASKET | PTFE | 1 |
| 9 | BODY | ASTM A351 CF8M | 1 |
| 10 | DISC | ASTM A351 CF8M | 1 |

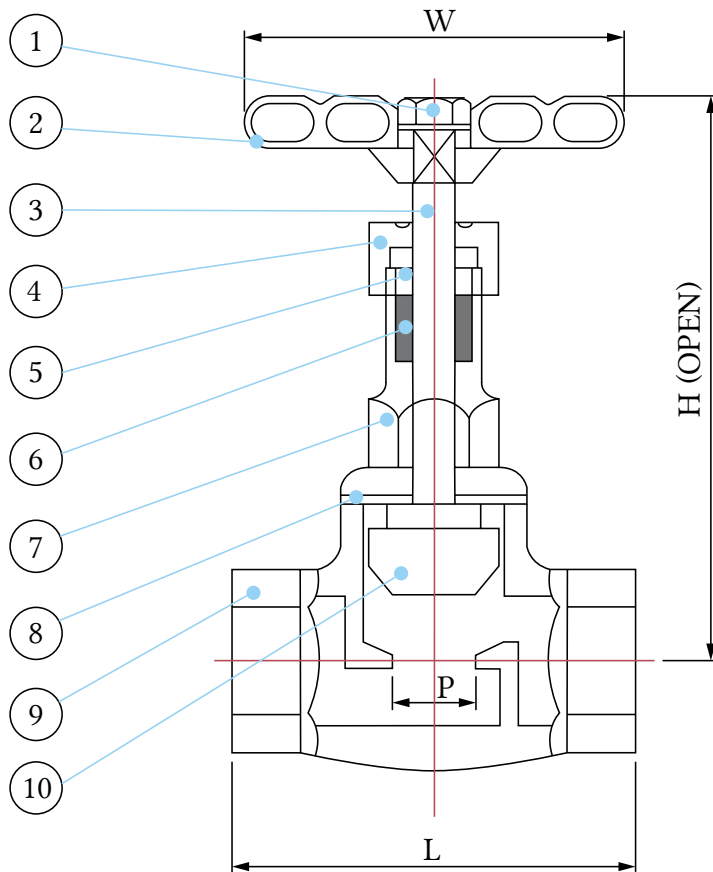

THERMOFLEX

Thermoflex 2136 Rue Léger, LaSalle, Québec, H8N 2L8, Canada

1-888-352-3414 514-367-1444 514-367-3193

thermoflex@bellnet.ca thermoflex.ca