# BALL VALVE: 3-PIECE THREADED
Brass

## FEATURES

- Standard port 600WOG ball valve
- Saturated steam: 150PSI
- Blow-out-proof stem
- Body: bronze
- Ball: brass with hard chrome plate
- Stem: bronze
- O-Rings: fluorocarbon rubber
- Seats: teflon (PTFE)
- Prolonged life expectancy
- Working pressure: 600PSI
- Temperature range: -50°F to 250°F (-45.5°C to 121°C)
- Open/close position indicator




## OPTION


- Padlocking device


# BALL VALVE: 3-PIECE THREADED
Brass


| DIMENSIONS | | | | | | |
|---|---|---|---|---|---|---|
| SIZE | A | B | C | D | E | WT |
| 3” | 175 | 127 | 64 | 104 | 203 | 19 |

** All dimensions recorded in millimeters*

| MATERIALS LIST | | | |
|---|---|---|---|
| No | PART | MATERIAL | QTY |
| 1 | HANDLE NUT | 304SS | 1 |
| 2 | HANDLE | GALVANIZED/304SS | 1 |
| 3 | PACKING GLAND | BRASS PRECISION MACHINED | 1 |
| 4 | PACKING | PTFE | 1 |
| 5 | GROUNDING WASHER | BRASS PRECISION MACHINED | 1 |
| 6 | BODY BOLTS | 304SS | 4 |
| 7 | CAP | BRONZE | 2 |
| 8 | O-RINGS | FLUOROCARBON RUBBER | 2 |
| 9 | SEAT | TEFLON (PTFE) | 2 |
| 10 | BALL | BRASS + HARD CHROME PLATE | 1 |
| 11 | BODY | BRONZE | 1 |
| 12 | THRUST WASHER | RTFE (+15% GF) | 1 |
| 13 | STEM | SILICON BRONZE PRECISION MACHINED | 1 |
| 14 | BODY NUT | 304SS | 4 |
| 15 | LOCKING DEVICE OPTION* | 304SS | 1 |

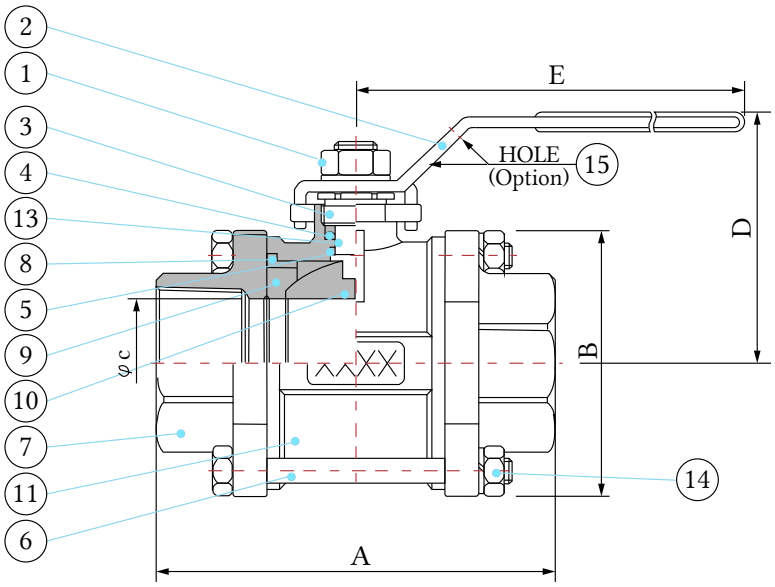

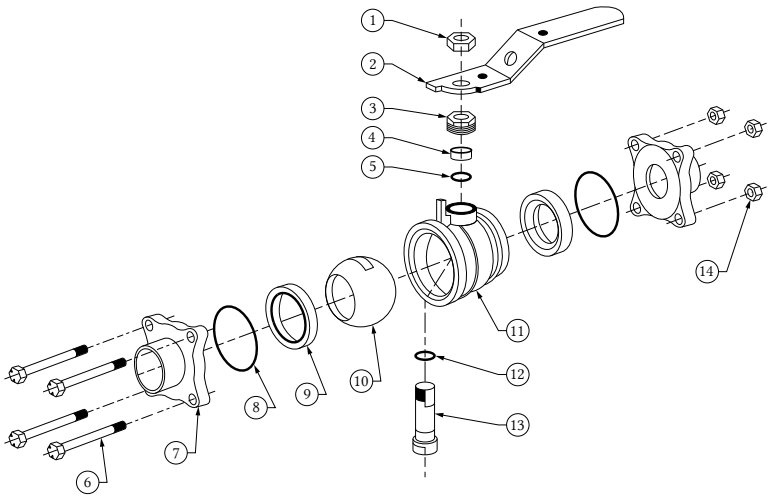

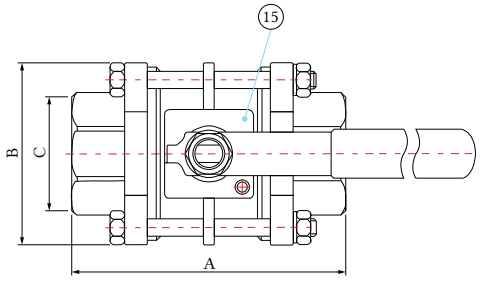**Thermoflex** 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca




**DISCLAIMER:** While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.