BALL VALVE: 3-PIECE FLANGED X FLANGED (B16.24/B16.10)

Brass

FEATURES

- Standard port 600WOG* ball valve
- Saturated steam: 150PSI*
- Blow-out-proof stem
- Body: bronze
- Ball: brass with hard chrome plate
- Stem: bronze
- O-Rings: fluorocarbon rubber
- Seats: teflon (PTFE)
- Flange: brass/cast bronze Class 150 ANSI B16.24
- Face to face: ANSI B16.10
- Prolonged life expectancy
- Working pressure: 600PSI*
- Temperature range: -50°F to 250°F (-45.5°C to 121°C)
- Open/close position indicator



OPTION

- Padlocking device

** Flanged assemblies: the pressure capacity of valve and flange assembly is restricted to the flange and not the valve.*


BALL VALVE: 3-PIECE FLANGED X FLANGED (B16.24/B16.10)


DIMENSIONS									
SIZE	L	D	K	H+/-5	N	D2	E+/-5	T min	A
3”	203	191	152.5	155	4	19	175	16	90

(d) -0/+10 “D”

** All dimensions recorded in millimeters*

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	HANDLE NUT	304SS	1
2	HANDLE	GALVANIZED/304SS	1
3	PACKING GLAND	BRASS PRECISION MACHINED	1
4	PACKING	PTFE	1
5	GROUNDING WASHER	BRASS PRECISION MACHINED	1
6	BODY BOLTS	304SS	4
7	CAP	BRONZE	2
8	O-RINGS	FLUOROCARBON RUBBER	2
9	SEAT	TEFLON (PTFE)	2
10	BALL	BRASS + HARD CHROME PLATE	1
11	BODY	BRONZE	1
12	THRUST WASHER	RTFE (+15% GF)	1
13	STEM	SILICON BRONZE PRECISION MACHINED	1
14	BODY NUT	304SS	4
15	LOCKING DEVICE OPTION*	304SS	1

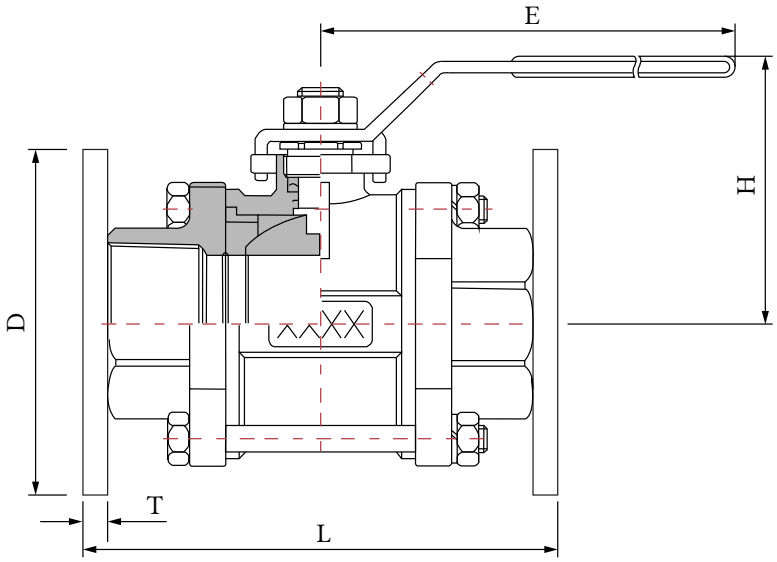

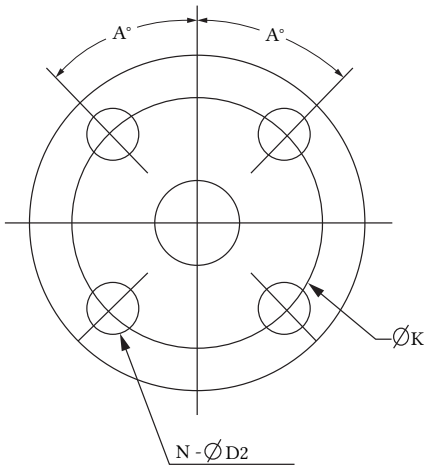

Holes applied evenly, symmetrically to the axis.

THERMOFLEX SINCE 1982

Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca

DISCLAIMER: While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.