
GATE VALVE: THREADED
Brass


FEATURES

- Full port 200WOG gate valve
- Non-rising stem
- Disc: ASTM B62
- Body: ASTM B62
- Threaded bonnet
- Gland packed
- NPT threaded end connections Class 125
- Temperature range: -50°F to 250°F (-45.5°C to 121°C)
- Test standard: MSS SP-80
- Open/close position indicator

OPTION

- Padlocking device
- Graduated open/close position indicator

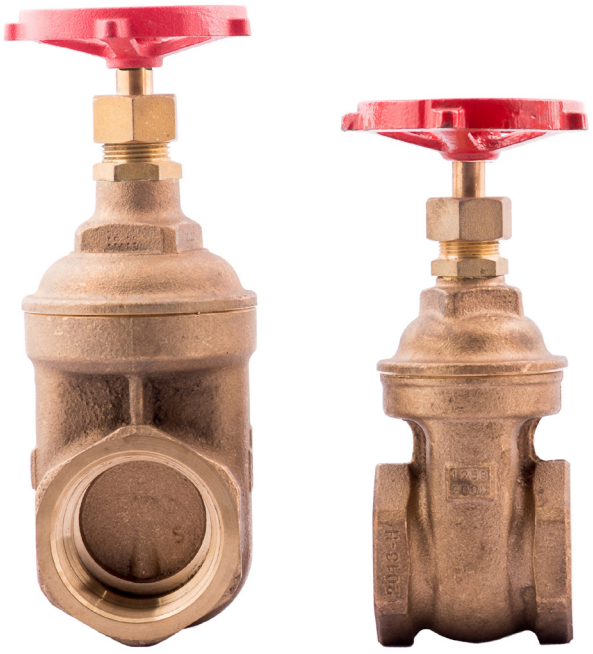

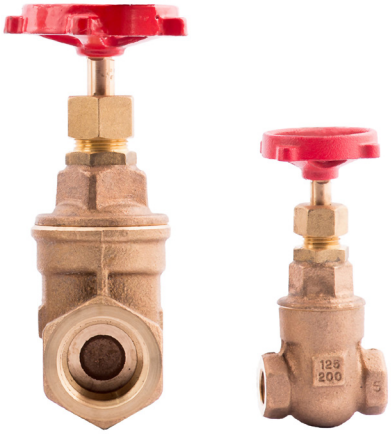


GATE VALVE: THREADED
Brass

DIMENSIONS				
SIZE	A	B	C	CV
¼"	44.5	92.1	50.8	5.6
⅜"	46.1	92.1	50.8	10.7
½"	50.8	92.1	50.8	17.6
¾"	54	111.1	63.5	32
1"	65.1	127	69.9	54
1 ¼"	70.6	135	79.4	97
1 ½"	71.5	161.1	88.9	135
2"	84.2	188.9	95.3	230
2 ½"	106.4	231.8	120.7	337
3"	117.5	265.9	133.4	536
4"*	139.7	393.7	133.4	960
	** 4" Split Wedge & Bolted Bonnet – does not conform to MSS SP-80*			

** All dimensions recorded in millimeters*

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	BODY	BRONZE ASTM B62	1
2	BONNET	BRONZE ASTM B62	1
3	WEDGE	BRONZE ASTM B62	1
4	STEM	BRONZE ASTM B62	1
5	STUFF NUT	BRASS ASTM B283 C37700	1
6	CHECK NUT	BRASS ASTM B283 C37700	1
7*	GLAND	BRASS ASTM B283 C37700	1
8	WHEEL NUT	BRASS	1
9	HAND WHEEL	MALLEABLE IRON	1
10	PACKING	GRAPHITE	1
11	NAME PLATE	ALUMINUM	1

** No 7: not applicable if 1/2" or smaller.*

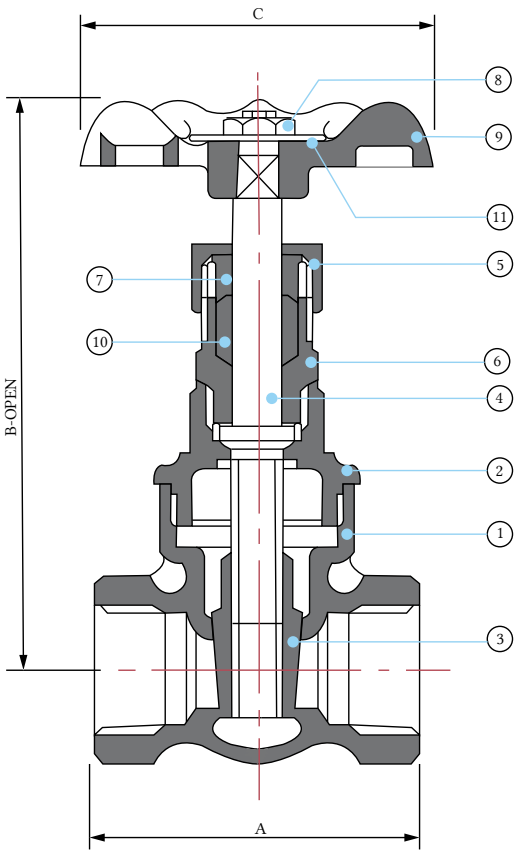

THERMOFLEX SINCE 1982

Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca

DISCLAIMER: While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.