
GATE VALVE: THREADED X FLANGED (B16.24)

Stainless Steel

FEATURES

- Full port 200WOG gate valve
- Working pressure: 200PSI*
- Non-rising stem
- Disc: ASTM A351 CF8M
- Body: ASTM A351 CF8M
- Threaded bonnet
- Flange: 316SS Class 150 ANSI B16.24
- Square-head pipe plug: brass
- Adjustable stem packing
- Temperature range: -58°F to 350°F (-50°C to 176°C)
- Test standard: API 598
- Open/close position indicator

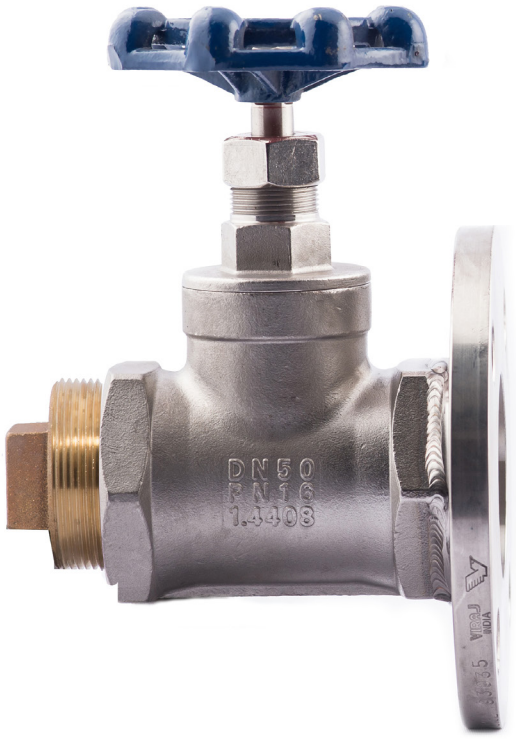

OPTION

- Square-head pipe plug: available in 304SS/316SS
- Flange: available in 304SS
- Padlocking device
- Graduated open/close position indicator


** Flanged assemblies: the pressure capacity of valve and flange assembly is restricted to the flange and not the valve.*

GATE VALVE: 2-PIECE THREADED X FLANGED (B16.24) SAMPLER
Stainless Steel

DIMENSIONS										
SIZE	L+/-5	D	K	H	N	D2	P	W	T min	a
½"	65	89	60.4	98	4	16	NPT ½"	70	8	45
¾"	69	98.5	70	103	4	16	NPT ¾"	70	8.75	45
1"	76	108	79	115	4	16	NPT 1"	76.5	9.5	45
1 ½"	98	127	99	173	4	16	NPT 1 ½"	103.5	11	45
2"	108	152.4	120.6	189	4	19	NPT 2"	121	12.75	45

** All dimensions recorded in millimeters*

MATERIALS LIST		
PART	MATERIAL	QTY
BODY	ASTM A351 CF8M	1
BONNET	ASTM A351 CF8M	1
STEM	ASTM A276 316SS	1
DISC	ASTM A351 CF8M	1
GASKET	PTFE	1
STOP RING	304SS	1
STEM HOLDER	316SS	1
STEM PACKING	PTFE	1
GLAND	304SS	1
GLAND NUT	316SS	1
HAND WHEEL	400SS	1
INDICATOR PLATE	ALUMINUM	1
HAND WHEEL WASHER	304SS	1
HAND WHEEL NUT	304SS	1
PIPE PLUG	BRASS	1
FLANGE	316SS	1

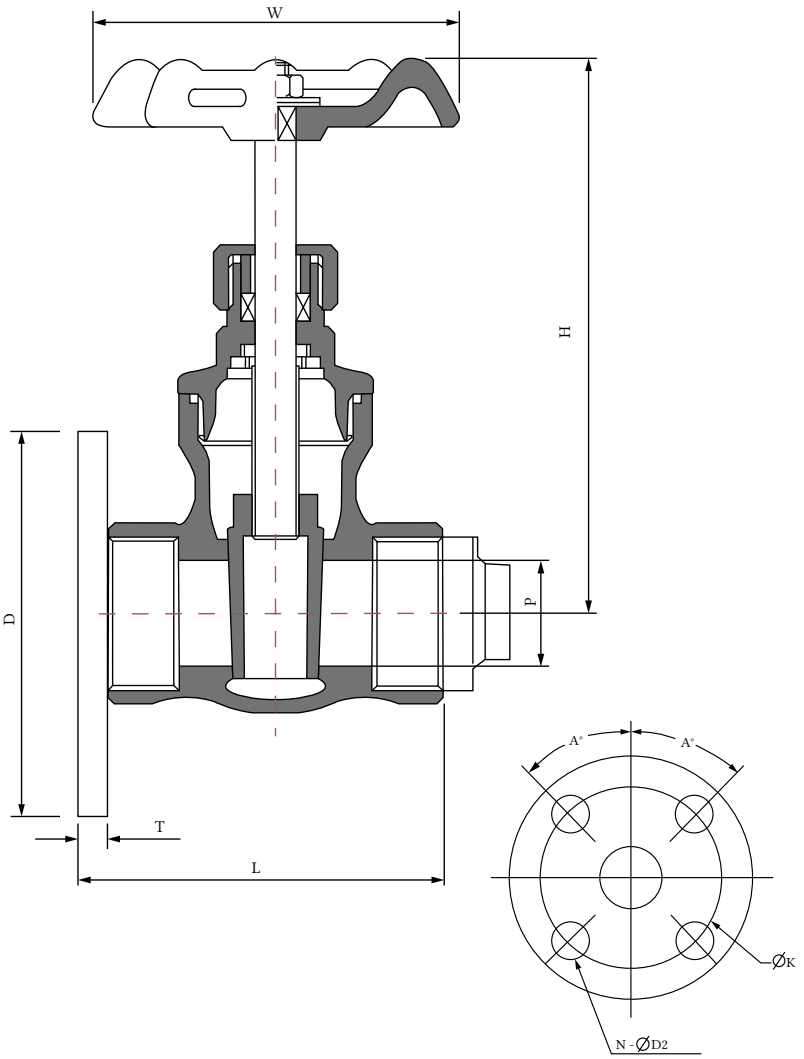

Holes applied evenly, symmetrically to the axis.

THERMOFLEX SINCE 1982

Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca

DISCLAIMER: While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.