

GLOBE VALVE: THREADED X FLANGED (B16.24) SAMPLER


Brass

FEATURES

- ◆ 200WOG globe valve
- ◆ Rising stem
- ◆ Disc: teflon
- ◆ Body: ASTM B62
- ◆ Threaded bonnet
- ◆ Gland packed
- ◆ Flange: brass/cast bronze Class 150 ANSI 16.24
- ◆ Square head pipe plug: brass
- ◆ 3/8" sampler boss
- ◆ Temperature range: -50°F to 250°F (-45.5°C to 121°C)
- ◆ Test standard: MSS SP-80
- ◆ Open/close position indicator

OPTION

- ◆ Padlocking device
- ◆ Graduated open/close position indicator
- ◆ 3/8" brass sampling device
- ◆ 3/8" brass pipe plug

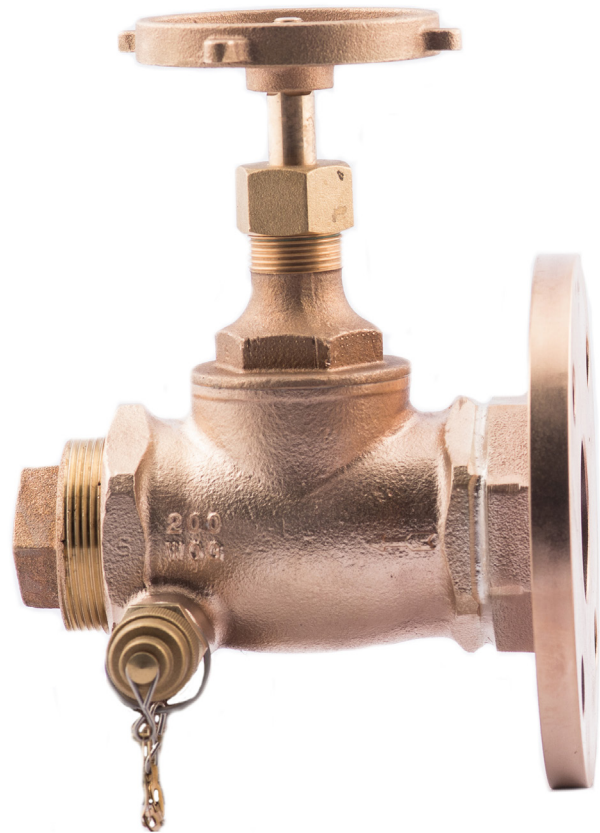

* Flanged assemblies: the pressure capacity of valve and flange assembly is restricted to the flange and not the valve.

GLOBE VALVE: THREADED X FLANGED (B16.24) SAMPLER

Brass




DIMENSIONS

SIZE	L+/-5	D	K	H	N	D2	P	C	T min	a	S
1"	103	108	79	111	4	16	NPT 1"	70	9.5	45	81
1 1/2"	115	127	99	146	4	16	NPT 1 1/2"	95	11	45	87.3
2"	140	152	120.6	171.5	4	19	NPT 2"	101.6	12.75	45	93

* All dimensions recorded in millimeters

MATERIALS LIST

No	PART	MATERIAL	QTY
1	BODY	BRONZE ASTM B62	1
2	BONNET	BRONZE ASTM B62	1
3	DISC HOLDER	BRASS ASTM B283 C37700	1
4	STEM	BRASS ASTM B283 C37700	1
5	STUFF NUT	BRASS ASTM B283 C37700	1
6	HAND WHEEL	BRONZE ASTM B62	1
7	DISC	PTFE	1
8	NAME PLATE	ALUMINUM	1
9	SAMPLING DEVICE OPTION*	BRASS PRECISION MACHINED	1

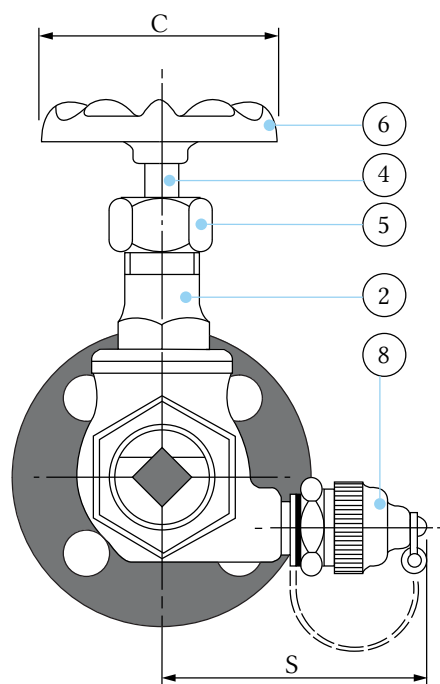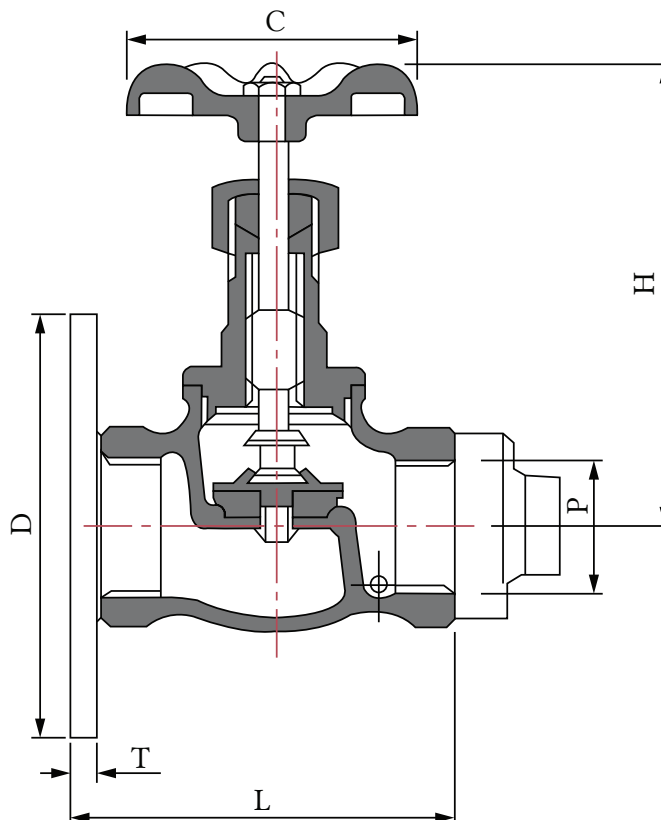

Holes applied evenly, symmetrically to the axis.

THERMOFLEX
SINCE 1982

Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada

1-888-352-3414 514-367-1444

sales@thermoflex.ca thermoflex.ca