THERMOFLEX
SINCE 1982

1-888-352-3414
www.thermoflex.ca

GLOBE VALVE: THREADED
Stainless Steel

FEATURES

- 200WOG globe valve
- Working pressure: 200PSI
- Rising stem
- Disc: ASTM A351 CF8M
- Body: ASTM A351 CF8M
- Seat: 316SS
- Threaded bonnet
- Adjustable stem packing
- NPT threaded end connections
- Temperature range: -58°F to 350°F (-50°C to 176°C)
- Test standard: API 598
- Open/close position indicator

OPTION

- Padlocking device
- Graduated open/close position indicator










GLOBE VALVE: THREADED
Stainless Steel

DIMENSIONS						
SIZE	P	W	H	L	CV	WT
¼"	10	60	102	52	1	0.73
⅜"	12	60	102	52	1.5	0.68
½"	12	70	95	66	2.5	0.93
¾"	15	70	99	68.5	5.6	1
1"	20	76.5	102	78.3	10.5	1.37
1 ¼"	25	103.5	126	86	17	2.31
1 ½"	33	103.5	136	98	25	3
2"	40	121	156	110.5	46	4.63

** All dimensions recorded in millimeters*

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	NUT	304SS	1
2	HANDWHEEL	400SS	1
3	STEM	ASTM A276 316SS	1
4	GLAND NUT	ASTM A351 CF8M	1
5	GLAND	ASTM A351 CF8M	1
6	GLAND PACKING	PTFE	1
7	BONNET	ASTM A351 CF8M	1
8	GASKET	PTFE	1
9	BODY	ASTM A351 CF8M	1
10	DISC	ASTM A351 CF8M	1

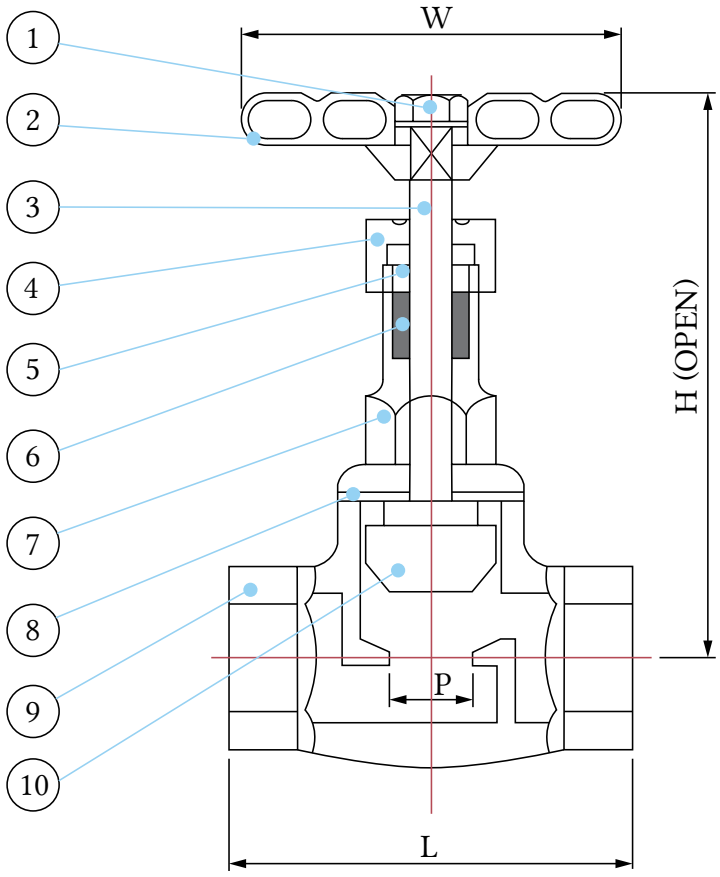

THERMOFLEX SINCE 1982
Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca

DISCLAIMER: While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.