GLOBE VALVE: THREADED X FLANGED (B16.5) SAMPLER

Stainless Steel

FEATURES

- 200WOG globe valve
- Working pressure: 200PSI*
- Rising stem
- Disc: ASTM A351 CF8M
- Body: ASTM A351 CF8M
- Seat: 316SS
- Threaded bonnet
- Flange: 316SS Class 150 ANSI B16.5
- Sampler: 3/8” 304SS
- Square-head pipe plug: brass
- Adjustable stem packing
- Temperature range: -58°F to 350°F (-50°C to 176°C)
- Test standard: API 598
- Open/close position indicator



OPTION

- Square-head pipe plug: available in 304SS/316SS
- Flange: available in 304SS
- Padlocking device
- Graduated open/close position indicator


** Flanged assemblies: the pressure capacity of valve and flange assembly is restricted to the flange and not the valve.*


GLOBE VALVE: THREADED X FLANGED (B16.5) SAMPLER
Stainless Steel

DIMENSIONS											
SIZE	L+/-5	D	K	D1	H	N	D2	P	W	T	a
1"	136.5	108	79	50.8	102	4	16	NPT 1"	76.5	14.2	45
1 ½"	164	127	99	73.1	136	4	16	NPT 1 ½"	103.5	17.2	45
2"	187	152.4	120.6	92	156	4	19	NPT 2"	121	19	45

** All dimensions recorded in millimeters*

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	NUT	304SS	1
2	HANDWHEEL	400SS	1
3	STEM	ASTM A276 316SS	1
4	GLAND NUT	ASTM A351 CF8M	1
5	GLAND	ASTM A351 CF8M	1
6	GLAND PACKING	PTFE	1
7	BONNET	ASTM A351 CF8M	1
8	GASKET	PTFE	1
9	BODY	ASTM A351 CF8M	1
10	DISC	ASTM A351 CF8M	1
11	PIPE PLUG	BRASS	1
12	FLANGE	316SS	1
13	SAMPLER	304SS	1
14	EXTENSION	316SS	1

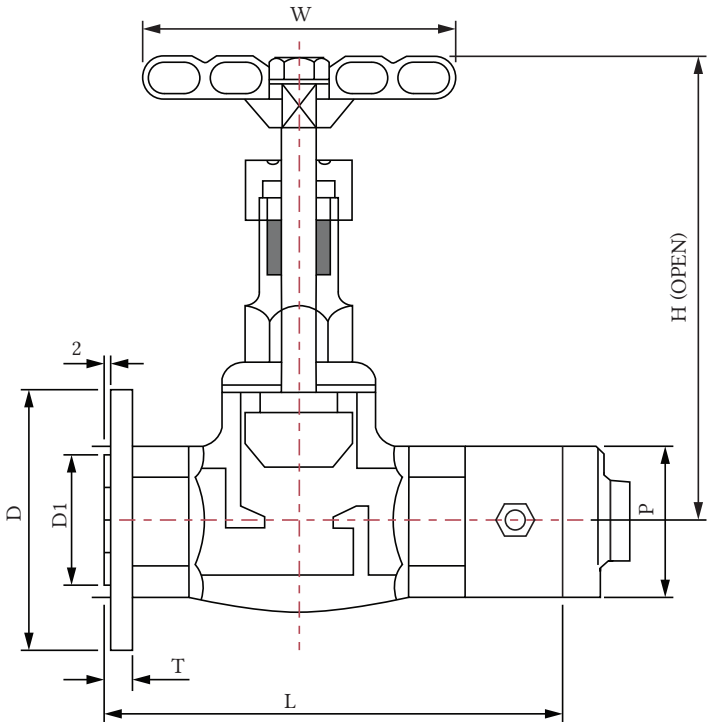

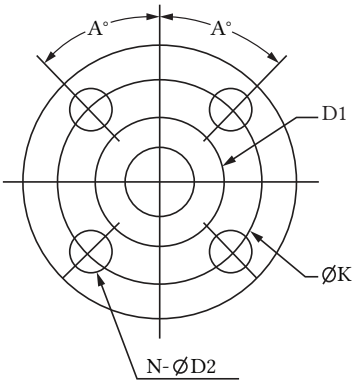

Holes applied evenly, symmetrically to the axis.

THERMOFLEX SINCE 1982

Thermoflex 1205 1re Avenue, Sainte-Catherine, Québec, J5C 1C5, Canada
1-888-352-3414 514-367-1444
sales@thermoflex.ca thermoflex.ca

DISCLAIMER: While every effort has been made to ensure the accuracy of the data herein, the data cited are subject to change without notice or liability.