

GATE VALVE: FLANGED X FLANGED – CLASS 150 (B16.5/B16.10) Stainless Steel

FEATURES

- ◆ Full port Class 150 gate valve
- ◆ Steam rating: 125PSI WSP
- ◆ Rising stem OS&Y
- ◆ Disc: ASTM A351 CF8M
- ◆ Body: ASTM A351 CF8M
- ◆ Stem: 316SS
- ◆ Packing: PTFE
- ◆ Temperature range: -58°F to 450°F
(-50°C to 232°C)
- ◆ Test standard: API 598
- ◆ Face to face: ANSI B16.10
- ◆ Flange: Class 150 ANSI B16.5
- ◆ Open/close position indicator
- ◆ NACE MR-0175 full compliance

OPTION

- ◆ Padlocking device
- ◆ Graduated open/close
position indicator
- ◆ Class 300



These valves are also available in cast steel; dimensions can be specified in Metric, U.S. Standard or JIS.


GATE VALVE: FLANGED X FLANGED – CLASS 150 (B16.5/B16.10)

Stainless Steel

DIMENSIONS												
SIZE	d	L	H1	K	H	F	T	G	M	N	CV	WT
½"	15	108	204	89	60.5	35	11.2	1.6	15.7	4	19	7.49
¾"	20	117	209	98.5	70	43	11.2	1.6	15.7	4	36	9.91
1"	25	127	229	108	79.5	51	11.2	1.6	15.7	4	57	12.11
1 ¼"	32	140	270	117.5	89	64	14.3	1.6	15.7	4	100	14.32
1 ½"	40	165	283	127	98.5	73	14.3	1.6	15.7	4	120	19.82
2"	50	178	332	152.5	120.5	92	15.9	1.6	19	4	140	25.33
2 ½"	65	190	397	178	139.5	105	17.5	1.6	19	4	240	39.66
3"	80	203	439	190.5	152.5	127	19.1	1.6	19	4	360	44.05
4"	100	229	518	229	190.5	157	23.9	1.6	19	8	580	66.08
5"	125	254	621	254	216.5	186	23.9	1.6	22.3	8	950	96.92
6"	150	267	714	279.5	241.5	216	25.4	1.6	22.3	8	2400	123.35
8"	200	292	914	343	298.5	270	28.6	1.6	22.3	8	4200	180.62
10"	250	330	1108	406.5	362	324	30.2	1.6	25.4	12	6800	290.75
12"	300	356	1553	482.5	432	381	31.8	1.6	25.4	12	9900	432.82

* All dimensions recorded in millimeters

MATERIALS LIST			
No	PART	MATERIAL	QTY
1	BODY	ASTM A351 CF8M	1
2	BONNET	ASTM A351 CF8M	1
3	STEM	ASTM A276 316	1
4	DISC	ASTM A351 CF8M	1
5	GLAND	ASTM A351 CF8M	1
6	GLAND PACKING	PTFE	1
7	GLAND FLANGE	ASTM A351 CF8M	1
8	HAND WHEEL	ASTM A536 B65-45-12	1
9	GASKET	PTFE	1
10	BONNET BOLT/NUT	ASTM A193 B8/ ASTM A194 GR8	4-16
11	GLAND BOLT/NUT	ASTM A193 B8/ ASTM A194 GR8	2
12	YOKE SLEEVE	BRONZE	1
13	HAND WHEEL NUT	STEEL	1
14	YOKE SLEEVE NUT	304SS	1
15	LOCKING DEVICE OPTION*	304SS	1

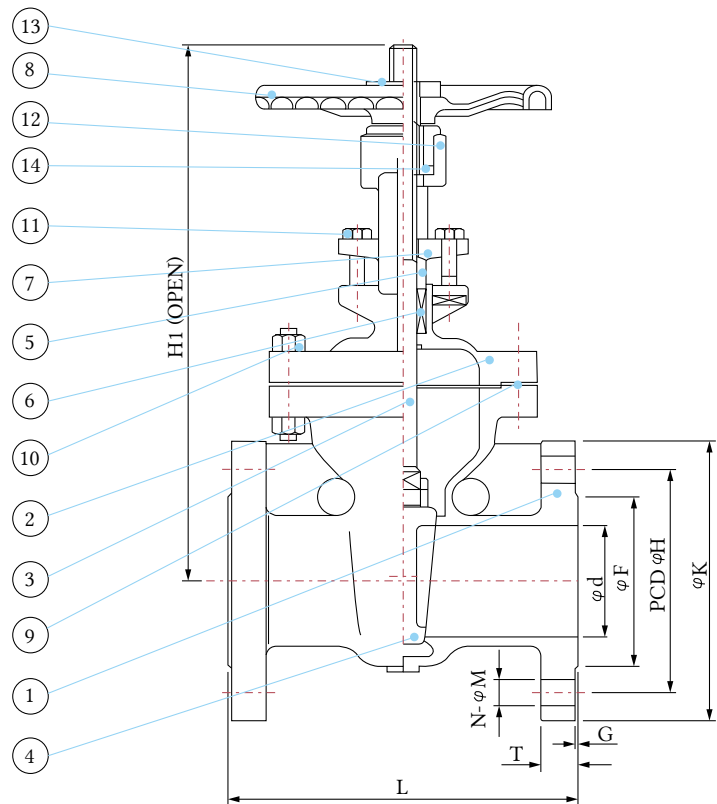

THERMOFLEX

Thermoflex 2136 Rue Léger, LaSalle, Québec, H8N 2L8, Canada

1-888-352-3414 514-367-1444 514-367-3193

thermoflex@bellnet.ca thermoflex.ca